

BAHAMA®

Pure





Bahama®

Bahama

Founded in 1950 today Bahama designs and manufactures a great variety of high-quality large-size parasols and sun sails. National and International customers alike trust in our industrial technology and accurate workmanship. The premium products from Bahama characteristically stand for technical attributes like compactness, durability and wind stability but also for aesthetical features like beautiful designs and materials.

»Made in Germany« – our full range production facility manufactures nearly all parts in house. Bahama further processes sustainable and environmentally friendly materials. The combination of high-quality materials and the structural features allows Bahama to guarantee wind stability for its products, depending on the model, of up to 130 km/h.

And most importantly: we love customer service – from consulting to installation, from cleaning to winter storage and maintenance.

Discover the possibilities of an extended outdoor season. No matter what the weather. Just get to know us!

„Pure“ — The Heart of it All

Pure is our entry-level model. The large-size umbrella has a convincing price-performance ratio, with the high standards of a professional large-size parasol. The product range is aimed at both commercial and private customers.

- ✿ 20 different model sizes ranging from 2.8 m² to 16 m²
- ✿ Round, square and rectangular models
- ✿ Reduced, puristic design
- ✿ Telescopic opening and closing, resulting in increased ground clearance
- ✿ Optimal fabric tension with the help of a tension handle integrated in the center pole
- ✿ No loose functional parts such as ropes, cranks or plugs
- ✿ Standard frame color in anthracite gray | RAL 7016, textured finish
- ✿ High grade, thoroughly tried and tested quality material »betex®05«
- ✿ Large selection of contemporary membrane colors
- ✿ Excellent UV-protection UPF 50+ (exception: snow 9577)
- ✿ Numerous possibilities for printing on the textile membranes and/or valances
- ✿ Up to 111-months wind warranty depending on installation options and parasol size of up to wind force 9 | 90 km/h



reddot winner 2023



The Pure 4 × 4 m wins the iF DESIGN AWARD 2023, the Red Dot Award 2023 and the German Design Award 2023. All awards, which are among the most acclaimed prizes for great designs since the 1950s, will be handed out separately. The independent international jury of experts awarded the coveted quality label among more than 6,000 submissions from over 50 countries.









Product Information

1 Textile Membranes

1.1. Brand Name: betex®05 | Fabric exclusively crafted for Bahama

100% polyester fabric with top transparent coating

Grammage of approx. 200 g/m²

Excellent UV-protection UPF 50+ protects against UV radiation (exception: snow 9577)

High degree of fabric lightfastness (i.e. fading) (DIN EN ISO 105-B02 Class ≥ 6-7)

High waterproofness, pressure resistance (DIN EN 20811, ISO 811 | Water column ≥ 100 mbar, 1.000 mm)

Low moisture absorption, dries quickly

High temperature resistance (DIN 53361 from -30°/+90°C)

Excellent friction resistance (DIN EN ISO 105-x12 | Class ≥ 4-5)

High tear resistance due to high thread count

Durable, tailor-made and dimensionally stable with perfect membrane tension

Sustainable and environmentally friendly fabrics with the OEKO-TEX 100 Standard, Class 1

Exchangeable and washable one-piece membranes

Numerous contemporary colors (custom colors upon request)

Supports digital printing



1.2. Premium Acrylic Fabric

100% solution-dyed premium acrylic fabric

Grammage of approx. 300 g/m²

Excellent UV-protection UPF 50+ protects against UV radiation

Highest degree of fabric lightfastness (i.e. fading) (DIN EN ISO 105-B02 | Class ≥ 7-8)

High waterproofness, pressure resistance (EN 20811, ISO 811 | Water column ≥ 35 m bar, 350 mm)

High tear resistance

24 standard colours – Additional colours available on request. Contact us!

5-year warranty on colour fastness and against abnormal fibre degradation

Supports screen printing



2 Umbrella Frame

The large-size Bahama umbrella consists of a double-T profile and two adjacent smaller columns. Optically combined they form a single column in the lower center pole part. Better sturdiness also means better stability and the corresponding safety. The standard frame color of the umbrella model is anthracite gray RAL 7016, textured finish. Due to the subsequent PES powder coating, the surface is impact and scratch resistant.

Center Pole

Invisible and internally strengthened center pole elements [2.1](#)

Pole diameter approx. 70 mm, wall thickness approx. 3 mm

Including locking device [2.2](#)

Especially stable due to the extruded aluminum hollow profiles

Spokes, Support Spokes, Bearings and Hinges

The quality of a parasol can only be as good as its supporting and connecting parts

Spokes and support spokes made of extruded aluminum hollow profiles [2.4](#)

Wall thickness approx. 2 mm with internal reinforcements

Spokes and support spokes are individually interchangeable quickly and easily due to their plug connection (stainless steel bolt with spring clip) [2.3](#)

High quality injection molded joint elements made of glass fiber reinforced polyamide (PA6GF30), color anthracite gray with a textured surface



Product Information



3 Installation Options

There is a choice of mobile or permanent installation options. Mobile installations are characterized by a greater degree of flexibility. When installing an in-ground option, building measures must be carried out. All installation options are hot-dip galvanized and optionally powder coated.

3.1. Mobile Installation Options

I. Steel Plate Base with

4 | 1 layer or 8 Steel Plates | 2 Layers

Plate size: 490 × 490 × 15 mm (ea. 28 kg)

Flat construction with only 15 mm installation height (30 mm respectively for a 2 layered system) [I.1](#)

Screw-on connecting components (receiving sleeve) with tilting hinge, powder-coated in anthracite gray RAL 7016, textured finish

Wind warranty only in connection with 2-layered steel plate base (8 steel plates)

Umbrella height and table clearance increase by 3 cm with a 1-layered steel plate base and by 4.5 cm with a 2-layered steel plate base

OPTIONAL

Powder-coating in anthracite grey | RAL 7016, textured finish

Spacer (e.g. for terrace substructures), starting at 89 mm [I.2](#). Measurements don't include the steel plate height nor the 8 mm thick winter cover, which has to be taken into consideration for flush-mounting

II. Cross-Frame

Size of cross-frame: approx. 1130 × 1130 mm

Steel frame For 8 standard flagstones 500 × 500 × 50 mm (not included in the price)

Weight of cross-frame: approx. 28 kg

OPTIONAL

Powder-coating in anthracite grey | RAL 7016, textured finish

Height adjustable in all 4 corners [II.1](#)

8 standard flagstones 500 × 500 × 50 mm required for all umbrella sizes

I.1



I.2



II



II.1





III. Concrete Stand

Size of concrete stand: approx. 800 x 800 x 250 mm,
weight approx. 310 kg (umbrella 250 mm higher)

Made of shapely exposed concrete, chamfered edges

For parasols with/without electro-mechanical features

With forklift slot

Connecting components with tilting hinge, powdercoated in RAL color of parasol frame

With wind warranty (mobile) for umbrellas with up to 4 m edge length or diameter



IV. Liro Mobile Stand – Liro Maxi Plus (rollable)

Size: 810 x 810 x 155 mm

Weight: approx. 240 kg

incl. adaptation for Pure

Ceramic cover plate in stone grey

Telescopic operating lever for moving the stand (removable)



V. Delschen Mobile Stand – Concrete Stand (rollable)

Size: 900 x 900 x 140 mm

Weight: 230 kg

incl. adaptation for Pure

3-piece in anthracite



3.2. Permanent Installation Options

I. In-Ground Tipping Base

Weight: approx. 3.4 kg

Lower part to be set in concrete

Screw-on connecting components (receiving sleeve) with tilting hinge, powder-coated in anthracite gray RAL 7016, textured finish [I.1](#)

The 8 mm thick winter cover has to be taken into consideration for flush-mounting





Product Information

II. Spacer

Spacer for Tipping Base for bridging a gap e.g. installation in a kindergarten sandbox; height order based starting at min. 89 mm to 392 mm [II.1](#) (special sizes on request)

Measurements don't include the steel plate height nor the 8 mm thick winter cover, which has to be taken into consideration for flush-mounting



III. Surface Mount

Size: 350 x 350 x 15 mm

Weight: approx. 14.2 kg

hot-dip galvanized

Powder-coating in anthracite grey | RAL 7016, textured finish

Screw-on connecting components (receiving sleeve) with tilting hinge, powder-coated in anthracite gray RAL 7016, textured finish [III](#)

Especially suited for bolting onto massive concrete surfaces

OPTIONAL

»fischer« heavy-duty anchoring bolts (1 set = 4 pcs.); type #FH II 15/15 SK A4; M10 thread; incl. concrete drill type #SDS Plus II, drill depth 105 mm and Allen wrench SW 6

also possible with a spacer [III.1](#) [II.2](#)



IV. Multi-use flange plate

For in-ground bases with 3 or 4 screws, with M10 or M12 screw connection, e.g. for Event or third-party footing devices

Size: 260 x 260 x 23 mm

Weight: 9.7 kg
(includes the winter cover)

Galvanized multi-use flange plate (20 mm) with stainless steel lid (3 mm) [IV.1](#)


Galvanized multi-use flange plate | adaption for In-Ground Tipping Base [IV](#)

incl. winter cover

Connecting components not included in the supply scope

OPTIONAL

Thread reducing bush for M16 holes

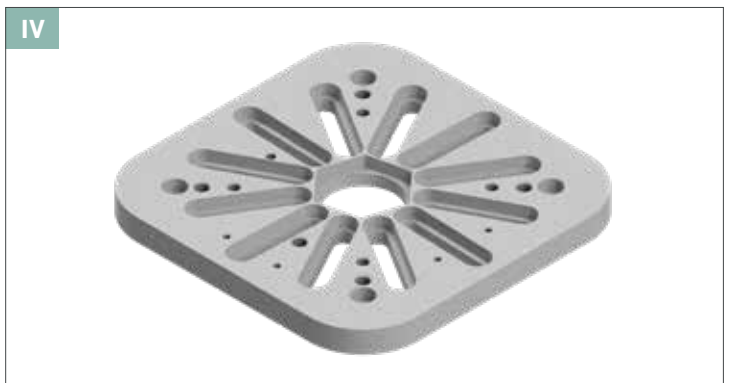

Additional Features



1 Valance

The valance is hemmed and dyed in the matching color.

Valance height approx. 30 cm
(The passage height is therefore reduced by 30 cm)

Continuous or split valance possible

Additional advertising space



2 Printing

The Bahama UV printer uses 9 color channels. Even pure white. Only lightfast and highest quality inks are used to ensure color accurate fonts, logos and emblems are positioned with millimeter precision. After the print job the membrane segments are sewed together.


No fading due to highly UV-resistant colors

Optimal advertising impact

Individual printing of the textile membranes



References: Mc Donalds, Starbucks, Heineken, Carlsberg, Bitburger, Gaffel, Café & Bar Celona, Café Extrablatt, Hilton, Kempinski et al

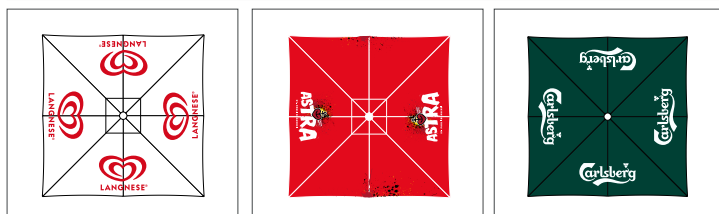

3 Transport Packaging

The parasols leave our production facility in perfect condition. To ensure they arrive in perfect condition they are delivered in a hard-cardboard cylinder tube.

Outer diameter: approx. 415 to 450 mm*

Cylinder length: approx. 4.200 to 4.570 mm*

Weight without parasol: approx. 30 kg*

**depending on model*



Additional Features



4 Protection Cover

Protective Cover basic

Light weather protection cover [4.1](#)
Tent fabric | Nicotarp with lacing

Protective Cover comfort

Robust weather protection cover [4.2](#)
betex®05« | Polyester | 9801 - concrete
With zipper for telescopic rod

Protective Cover comfort with Telescopic Rod

Equipped with a telescopic rod [4.2](#), when ordering more than one cover, only one telescopic rod is necessary
Easy to put over the parasol
Recommended for all models, sizes > 3 m



5 Impact Protection

Colorful soft foam safeguard; available in 10 colors
Cuff with soft foam on the inside
Outer material made of polyester fabric with PVC coating
With Velcro fasteners
Must be removed before opening or closing the umbrella



Notice: Image 5 shows a different umbrella model



Handling

Opening and closing is quick and easy.
For more detailed information, please refer to the video manuals on our website www.bahama.de

OPENING

- Take off the safety strap
- To relieve the lock located in the slider ring (optional equipment) **1** press a spoke towards the center pole
- Open the lock (optional equipment) in the slider ring (turn the key clockwise)
- Lift the ends of the spokes until the parasol opens by itself
- Attention: The tension handle may not be locked during this process **2**
- Lift the tension handle, press the slider ring down, place the compression clamp on the hook and push the tension handle downwards to fully tension the umbrella **3**

CLOSING

- Lift handle up
- Press the slider ring down to unhook the compression clamp
- Lift the tension latch further up
- Push the slider ring up
- Push the spokes towards the center pole, lock-up the slider ring lock **1**
- Press the tension latch back towards the center pole
- Pull the tips of the fabric to the outside of the closed parasol and spirally wrap them around the center pole **4**
- Wrap the safety strap around the parasol **5**

The excellent appearance and the technical features of the textile membrane can be maintained by adhering to the following closing procedures:

Always pull the tips of the fabric to the outside of a closed parasol


Do not store the parasol with any fabric stuck between the spokes and support spokes

Spirally wrap the fabric around the center pole

Wrap the safety strap around the parasol to secure the fabric


Re-adjust safety strap(s) in case of longer closing times

A protective cover is recommended in case of longer closing times

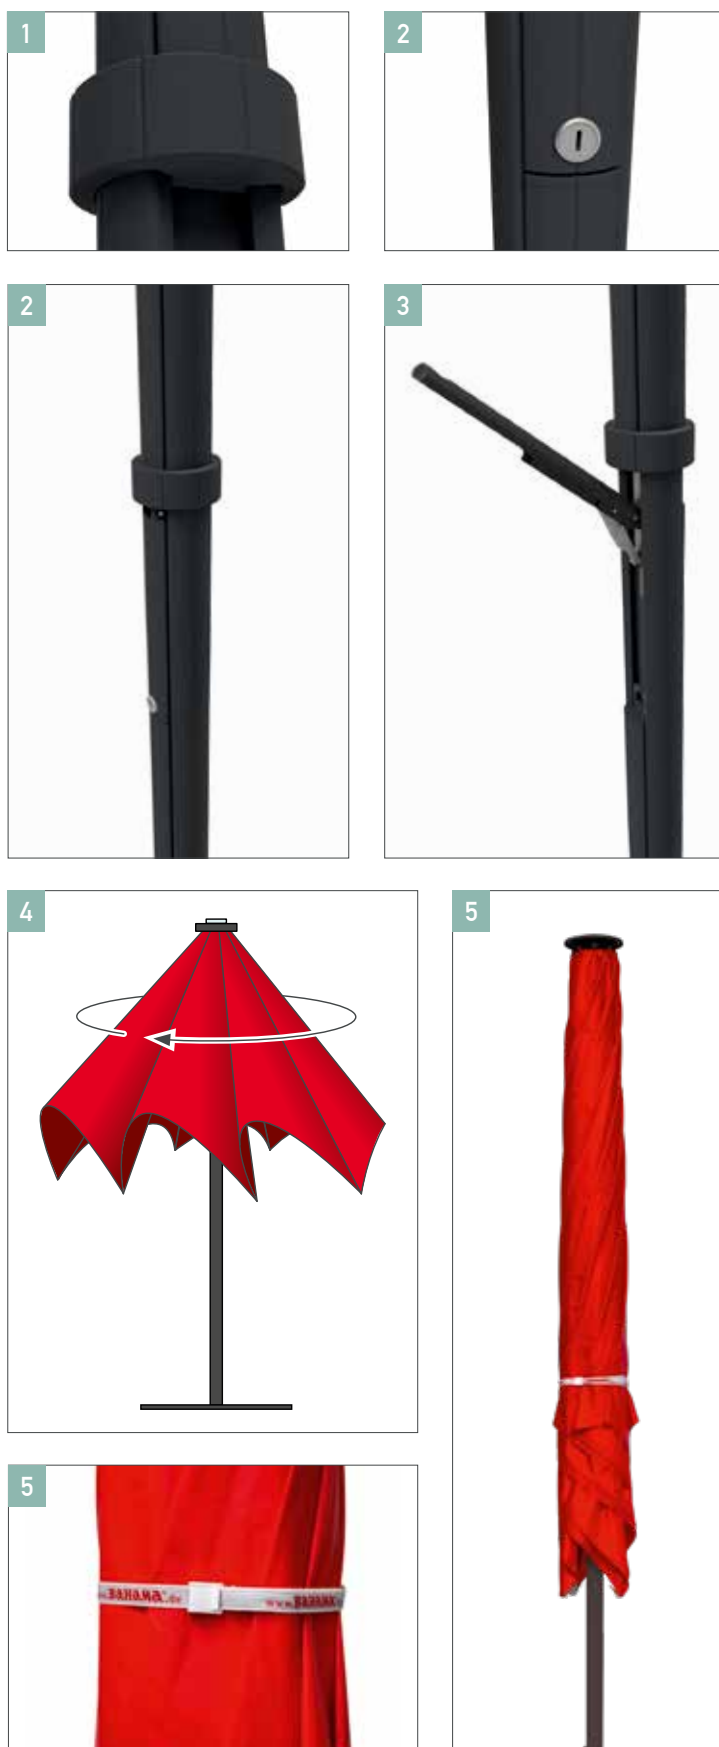

Notice: Images 4 and 5 show a different umbrella model

Dimensions & Technical Data

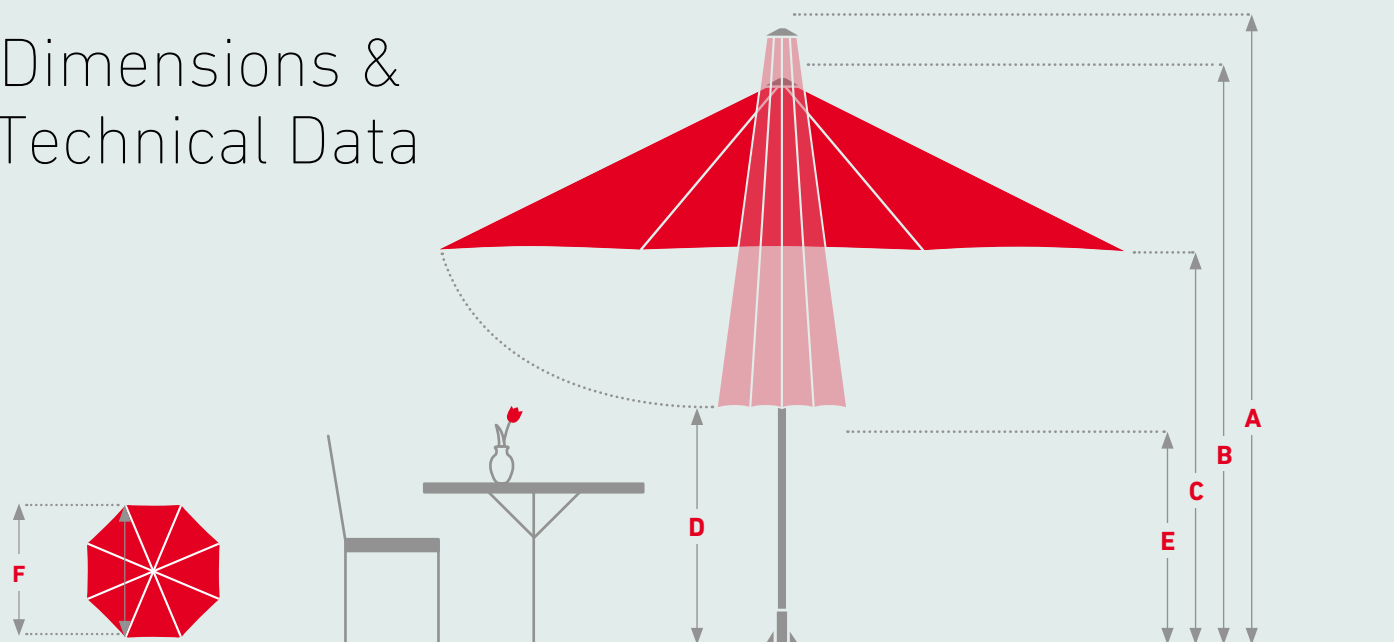


					
All measurements are approximate	Ø 2.0 m 8 spokes	Ø 2.5 m 8 spokes	Ø 3.0 m 8 spokes	Ø 3.5 m 8 spokes	Ø 4.0 m 8 spokes
Area in m ²	2,8	4,4	6.3	8,6	11.3
Parasol weight in kg	24	28	30	32	35
A Height closed* in cm	294	308	323	338	353
B Height opened* in cm	270	276	281	287	293
C Passage height* in cm	240	240	240	240	240
D Ground clearance* in cm	193	182	171	160	150
E Ground clearance* in cm when adding valances	163	152	141	130	120
F Inside circle dia. in cm	180	230	280	320	370
Max. permitted wind velocities fully opened parasol, km/h Permanent	90	89	84	79	73
Max. permitted wind velocities fully opened parasol, km/h Mobile 2-layered	68	67	63	60	55

				
All measurements are approximate	2.5 × 2.0 m 6 spokes	3.0 × 2.0 m 6 spokes	3.0 × 2.5 m 8 spokes	3.5 × 2.0 m 6 spokes
Area in m ²	5	6	7,5	7
Parasol weight in kg	26	27	30	28
A Height closed* in cm	321	331	341	342
B Height opened* in cm	270	270	275	270
C Passage height* in cm	240	240	240	240
D Ground clearance* in cm	161	151	146	140
E Ground clearance* in cm when adding valances	131	121	116	110
Max. permitted wind velocities fully opened parasol, km/h Permanent	88	86	83	84
Max. permitted wind velocities fully opened parasol, km/h Mobile 2-layered	66	65	63	63


* All measurements refer to the use with a permanent installation option (in-ground sleeve).

Telescopic Opening and Closing

**Bahama Parasol
WITH Telescope**

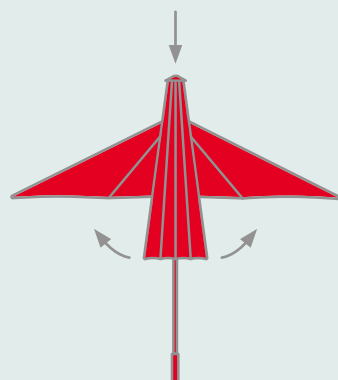

**Standard Parasol
WITHOUT Telescope**



All measurements are approximate

					
	2.0 × 2.0 m 4 spokes	2.5 × 2.5 m 8 spokes	3.0 × 3.0 m 8 spokes	3.5 × 3.5 m 8 spokes	4.0 × 4.0 m 8 spokes
Area in m ²	4	6.3	9	12.3	16
Parasol weight in kg	24	29	33	36	39
A Height closed* in cm	312	332	353	373	394
B Height opened* in cm	270	275	281	287	293
C Passage height* in cm	240	240	240	240	240
D Ground clearance* in cm	171	155	139	124	109
E Ground clearance* in cm when adding valances	140	125	109	94	79
Max. permitted wind velocities fully opened parasol, km/h Permanent	90	86	80	73	65
Max. permitted wind velocities fully opened parasol, km/h Mobile 2-layered	68	65	60	55	49

					
3.5 × 2.5 m 8 spokes	3.5 × 3.0 m 8 spokes	4.0 × 2.0 m 6 spokes	4.0 × 2.5 m 8 spokes	4.0 × 3.0 m 8 spokes	4.0 × 3.5 m 8 spokes
8,8	10,5	8	10	12	14
32	33	29	33	35	36
351	362	353	362	372	382
275	281	270	275	281	287
240	240	240	240	240	240
136	130	130	126	121	115
106	100	100	96	91	85
81	77	82	78	74	70
61	58	62	59	56	53



Good to know

Sustainability and Environmental Compatibility

The betex®05 fabric, exclusively crafted for Bahama, and the resulting textile membrane are certified exclusively according to the OEKO-TEX 100 standard, Class 1 which is awarded by independent institutions. Class 1 meets the demands of baby clothing with skin contact.

The OEKO-TEX pollutant test corresponds to the respective intended use of the textiles and materials. In Germany there are clear and reliable criteria for environmental compatibility and sustainability. Bahama demands of its products that every defect or damaged part can be replaced.

Made in Germany

Bahama's customers always refer back to the great importance of our German production facilities. »Made in Germany« is still a unique selling point and a reason to buy. Bahama's full range production facility is located in Germany.

The combination of the highest quality materials and structural features allows Bahama to guarantee the wind stability of its products, depending on the model, up to 130 km/h. In addition to the technical details of the parasol, it is especially the lightfastness of the fabrics' colors, the waterproofness and grammage as well as the water column of the textile membranes which make Bahama top of its class. Trust is placed in Bahama by luxury hotels such as the Burj Al Arab in Dubai, the Hotel Sacher in Vienna and the Dalí Museum in St. Petersburg, USA.

Service

Service greatly influences the life span of a parasol. The exchangeable textile membrane of a Bahama parasol can – after being exposed to all sorts of weather conditions for years – be cleaned or replaced. Our service makes a full technical and general overhaul of the product such that they not only look attractive, but can defy the strongest of winds.

No matter where you need Bahama's service, the Bahama team or one of our expert partners will be glad to help –worldwide.

Careful and individual planning

Installation of new parasols

Fitting of new textile membranes

Complete service i.e. assembling and disassembling the large parasols, washing, cleaning and maintenance of the frame and textile membranes

Membrane service, i.e. fitting and removing the textile membrane, cleaning and repairing

Storage of the returned and serviced large-size parasols and/or textile membranes

Technical trainings

UV-Protection

Analogous to the sun protection factor/SPF all textiles are labeled with the ultraviolet protection factor/UPF. Built into the fabric it protects against hazardous UV radiation. Bahama uses the fabric brand betex®05 for the production of its parasol textile membranes. This material fulfills the requirements for UPF 50+ (exception: snow 9577), which indicates an »excellent« dermatological UV protection factor and allows less than one fiftieth (<2%) of the UV radiation through the textile membrane onto the skin.

Important Notes on the Characteristics of Our Fabrics

Our fabrics for outdoor use are specially designed to reliably withstand wind, sun, and occasional rain. Despite precise manufacturing, certain visual or material-specific characteristics may occur. These are natural side effects of fabric production, processing, and use, and do not affect the function or usability of your parasol.

Creases

During tailoring and folding of the fabric, temporarily visible lines may appear. On lighter-colored fabrics, these creases may visually resemble faint shadows. They affect only the appearance and have no impact on the material's performance.

Whitening (Fiber Strain Marks)


During processing, areas under high stress or folds may show lightening. These appear as light lines or streaks caused by tension in the fabric during tailoring. Even with the greatest care, such effects cannot be completely avoided.

Abrasion Marks

Regular use or movement in the wind may cause localized friction marks, for example, where the fabric rubs against the frame or is under tension when closed. Carefully closing and securing the umbrella with our Bahama straps reduces unnecessary contact and helps minimize wear.

Water Resistance & Rain Protection

Our fabrics are water-repellent and provide reliable protection in light rain. Prolonged or heavy exposure to moisture should be avoided, as it can stress the material over time. We recommend closing the umbrella during extended rain and fully opening any damp fabric afterward to allow it to dry completely, preventing mildew.



01/2026

BAHAMA[®]